



- NOTES:
1. POND BERMS TO CONSTRUCTED USING IMPERVIOUS MATERIAL, COMPACTED TO 95% S.P.D, AND INSPECTED BY A PROFESSIONAL ENGINEER.
 2. A 1.5m HIGH BARRIER FENCE SHALL BE ERECTED ALONG PERIMETER OF SEDIMENT BASIN. WARNING SIGNS SHALL BE ATTACHED TO THE FENCING STATING THE AREA IS OFF LIMITS TO THE GENERAL PUBLIC, AND ADVISING THAT THE BASIN IS USED FOR SEDIMENT CONTROL PURPOSES, AND THAT THE SUBJECT AREA IS SUBJECT TO FLASH FLOODING.
 3. THE BASIN IS TO BE CONSTRUCTED ON THE BASIS OF A MIN. LENGTH TO WIDTH RATIO OF 4 TO 1.

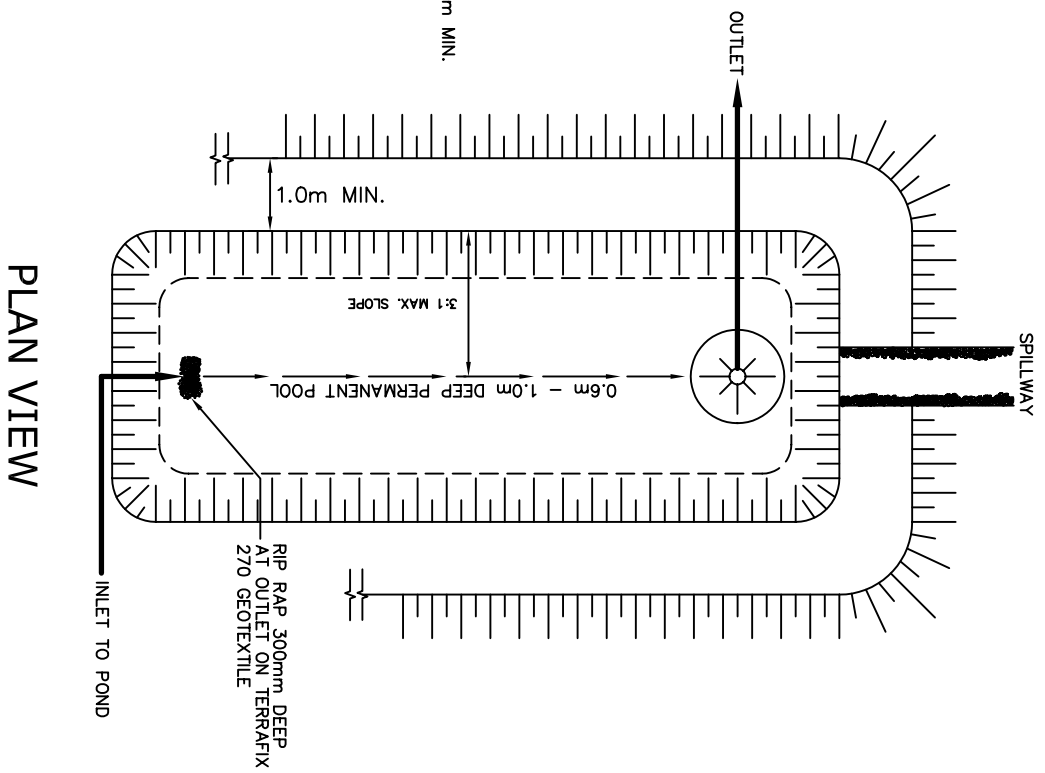

PLAN VIEW

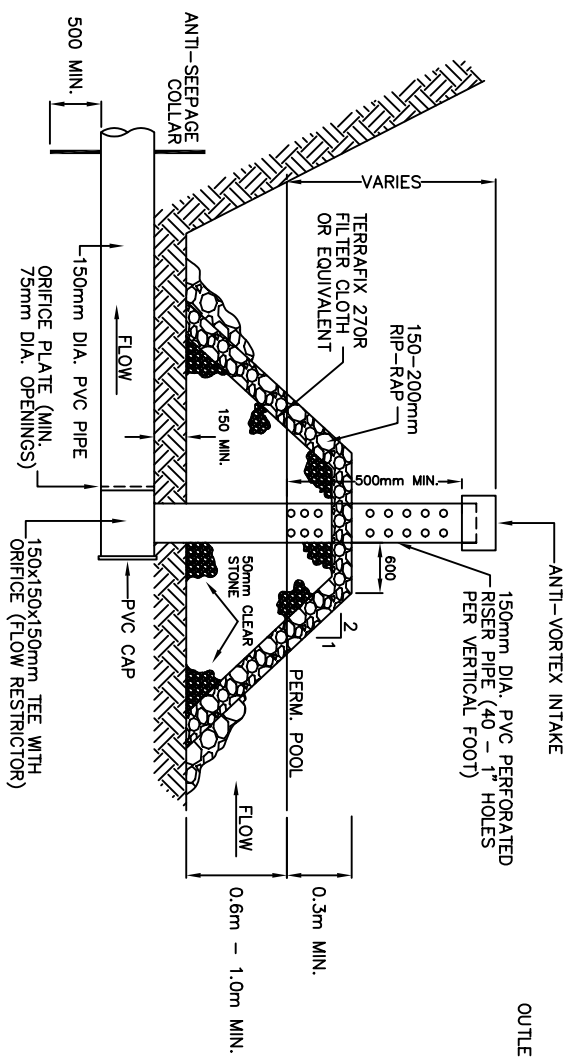

**Nottawasaga Valley
Conservation Authority**

**TEMPORARY SEDIMENT
BASIN OUTLET DETAILS**

NO.	REVISION	APR'D	DATE	APR'D:	DATE:
				A.S.C	03.02.20
				SCALE:	N.T.S
				BSD-23A	